


“Maestro” GPRS/SMS modem option installation

SUPPLIED MATERIAL

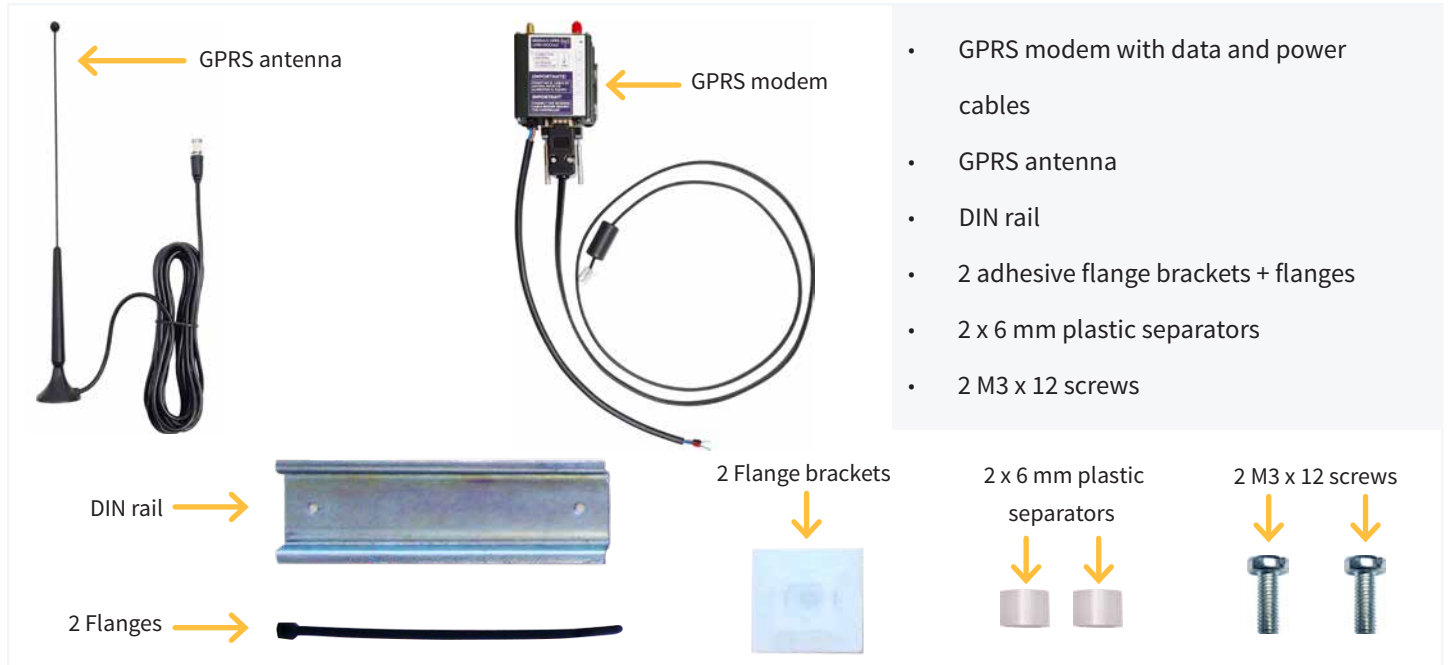

MOUNTING

1 Disconnect power to the controller.




2 On the relay base of the controller, remove the 2 indicated screws and their washers.

3 Overlap the DIN rail, the two 5 mm separators, the washers and screw the two M3 x 12 screws.


4 Place the 2 flange brackets in the indicated placed.

5 Place the GPRS modem on the DIN rail.

6 Hold the data and power cable with the 2 flanges.

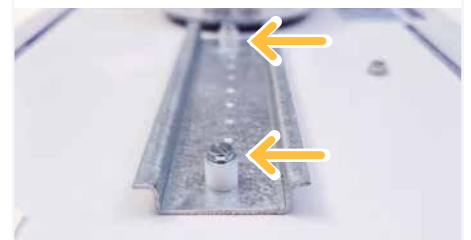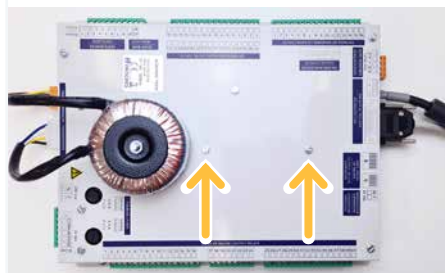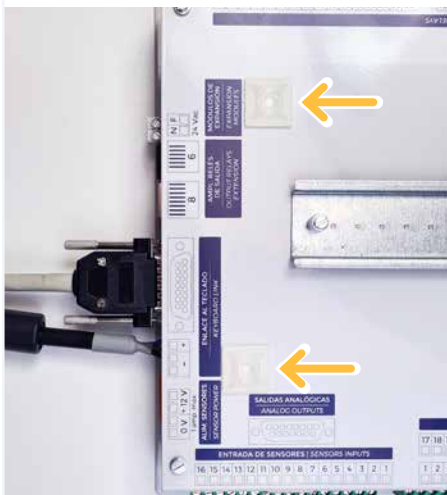

7 Connect the power cable of the GPRS modem to the “**Sensor supply**” terminal. Blue is +12V and brown is 0V.

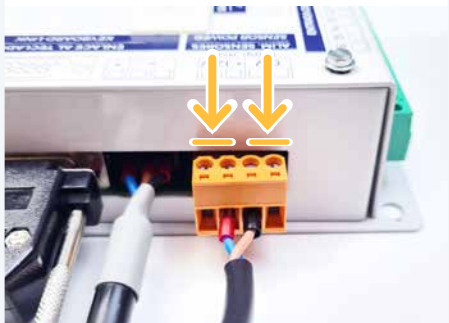

8 Inside the modem there is Progres SIM card. If extraction is needed, press the yellow button.



9 Connect the data cable to the RS-232 (GPRS) port on the keyboard board.



10 Connect the antenna and place it at a high point so that it has the best possible coverage or close to a window. Don't leave the antenna cable coiled and stretch it out completely.

NOTE

The SIM card inside the modem is deactivated. If you want to use it, you need to register the controller in the cloud and select it during the purchase process.

Look in the brochure “**Steps to follow to use the Agrónic APP and the Agrónic Web**”.

It is important to connect the antenna cable before power the controller as the modem may be damaged.